


Rated for continuous
use at -17°C to +60°C.

Poly Tuff® II 300V Max.

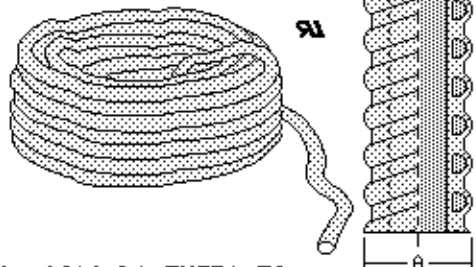

Liquidtight EXTRA-Flex
Nonmetallic Tubing

UL CSA■

EXTRA-FLEXIBLE TUBING

-17°C to +60°C

Flüssigkeitsdichter Kunststoffschlauch, EXTRA-Flex. UPE=Packed

Nominal	Cat.No.	Ref.ID#	UPE	A	B	Description (3/8 to 2)
3/8	6711■	B2038	30m	17.8	12.5	The EXTRA-FLEXIBLE tubing is designed to be used where vibration or constant flexing are present and where wiring space is limited.
1/2	6712■	B2050	30m	21.1	16.1	
3/4	6713■	B2075	30m	26.4	21.1	
1	6714■	B2100	30m	33.1	26.8	
1 1/4	6715	B2125	30m	41.8	35.4	
1 1/2	6716■	B2150	15m	47.8	40.3	
2	6718	B2200	15m	59.9	51.6	