

USA / Canada - Short Strap Receptacles, 5258-SS Series


Commercial Grade, Straight Blade,
Short Strap Single Receptacles

SPECIFICATIONS


- 2 Poles, 3 Wire Grounding
- Side Screw Termination
- Steel Mounting Strap
- 8-32 Tapped Mounting Holes
- Nylon Body, Commercial Grade
- Environmental: Flammability, Rated V2
- Operating Temperature: From -40° C (without impact) to 60°C maximum continuous
- UL Listed 498 and CSA Certified



Catalog Number	Color	Ratings	NEMA	Mounting	Weight/ea	VPE/Pack	EDP-No.
5258-SS BLACK	Black	125V / 15A	5-15R	1 ³ / ₄ Inch	43 g	50/10 ea	107165
5258-SS IVORY	Ivory	125V / 15A	5-15R	1 ³ / ₄ Inch	43 g	200 ea	101256
5284-SS BLACK	Black	125V / 15A	5-15R	1 ¹⁵ / ₁₆ Inch	43 g	50/10 ea	101279
5458-SS BLACK	Black	250V / 20A	6-20R	1 ³ / ₄ Inch	43 g	50/10 ea	101327
5658-SS BLACK	Black	250V / 15A	6-15R	1 ³ / ₄ Inch	43 g	50/10 ea	101354

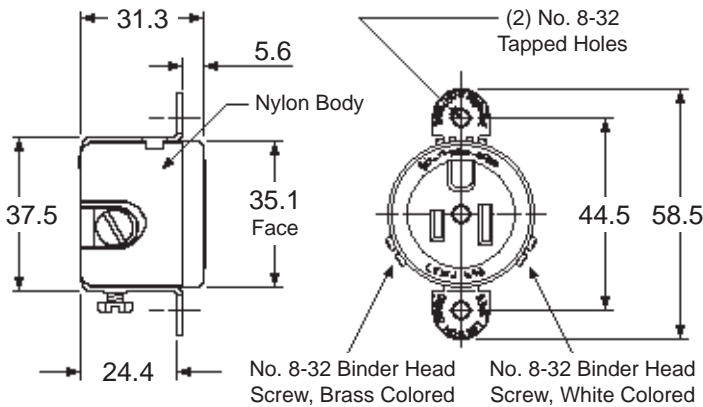

Dimensions refer to 5258-SS, 5458-SS, and 5658-SS

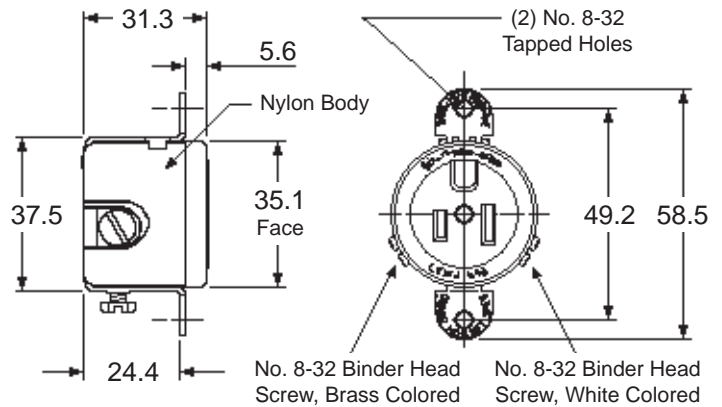

Dimensions refer to 5284-SS only

To learn more about B-I-A please visit us at our
WEB site: www.BiaGmbH.com

