


*UPE/Put-Up upon Request

- ◆ UL listed SOOW-A (file no. E7362)
- ◆ CSA listed SOOW (file no. LL8825)
- ◆ OSHA acceptable
- ◆ Passes MSHA flame test (P-136-MSHA)

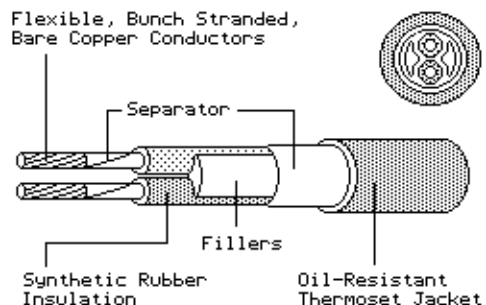

PORTABLE CONTROL CABLE ◆ USA/Canada ◆ 600 Volts ◆ 105°C SOOW-A/90°C SOOW

CatNo.	AWG	Stranding	Insul	Jackt	O.D.	Amp.	kg/km	UPE/Put-Up	P/N	Repl.
SO	16/2	26x30 AWG	0.76	1.52	9.27	13.0	124	1x 76m	20701	---
SO	16/3	26x30 AWG	0.76	1.52	9.78	13.0	151	1x 76m	20702	---
SO	16/4	26x30 AWG	0.76	1.52	10.41	10.0	178	1x 76m	20709	---
SO	16/5	26x30 AWG	0.76	2.03	12.45	8.0	234	*	22104	23105
SO	16/6	26x30 AWG	0.76	2.03	13.21	8.0	269	*	22105	23104
SO	16/7	26x30 AWG	0.76	2.03	13.21	8.0	284	*	23101	---
SO	16/8	26x30 AWG	0.76	2.03	14.10	7.0	314	*	22106	22005
SO	16/9	26x30 AWG	0.76	2.03	14.99	7.0	336	*	32011	---
SO	16/10	26x30 AWG	0.76	2.03	15.49	7.0	379	*	22107	---
SO	16/12	26x30 AWG	0.76	2.03	16.26	5.0	460	*	22109	---
SO	16/14	26x30 AWG	0.76	2.41	18.03	5.0	527	*	31154	---
SO	16/16	26x30 AWG	0.76	2.41	18.92	5.0	603	*	22110	---
SO	16/18	26x30 AWG	0.76	2.41	19.81	5.0	650	*	32012	---
SO	16/20	26x30 AWG	0.76	2.41	20.32	5.0	726	*	22111	---
SO	16/24	26x30 AWG	0.76	2.41	21.97	4.5	832	*	30856	---
SO	16/30	26x30 AWG	0.76	2.79	24.77	4.5	1092	*	22112	---