


*UPE/Put-Up upon Request

- ◆ UL listed SOOW-A (file no. E7362)
- ◆ CSA listed SOOW (file no. LL8825)
- ◆ OSHA acceptable
- ◆ Passes MSHA flame test (P-136-MSHA)

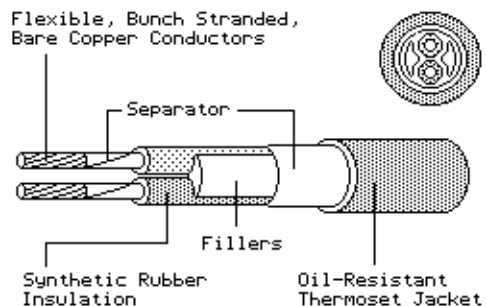

PORTABLE CONTROL CABLE ◆ USA/Canada ◆ 600 Volts ◆ 105°C SOOW-A/90°C SOOW

CatNo.	AWG	Stranding	Insul	Jackt	O.D.	Amp.	kg/km	UPE/Put-Up	P/N	Repl.
SO	14/2	41x30 AWG	1.14	2.03	12.57	18.0	212	1x 76m	20710	---
SO	14/3	41x30 AWG	1.14	2.03	13.21	18.0	255	1x 76m	20711	---
SO	14/4	41x30 AWG	1.14	2.03	14.22	15.0	317	1x 76m	20716	---
SO	14/5	41x30 AWG	1.14	2.41	16.13	12.0	381	*	22113	23083
SO	14/6	41x30 AWG	1.14	2.41	17.45	12.0	473	*	22114	23081
SO	14/7	41x30 AWG	1.14	2.03	16.64	12.0	517	*	34199	23950
SO	14/8	41x30 AWG	1.14	2.41	18.72	10.5	559	*	22115	23079
SO	14/10	41x30 AWG	1.14	2.41	20.70	10.5	697	*	22116	---
SO	14/12	41x30 AWG	1.14	2.41	21.72	7.5	790	*	22117	---
SO	14/14	41x30 AWG	1.14	2.41	23.24	7.5	889	*	32013	---
SO	14/16	41x30 AWG	1.14	2.79	25.27	7.5	1035	*	22118	---
SO	14/18	41x30 AWG	1.14	2.79	26.54	7.5	1135	*	---	---
SO	14/20	41x30 AWG	1.14	2.79	27.18	7.5	1216	*	22119	---
SO	14/24	41x30 AWG	1.14	2.79	29.46	6.8	1441	*	34200	---
SO	14/36	41x30 AWG	1.14	3.18	35.56	6.0	1962	*	34201	---
SO	14/37	41x30 AWG	1.14	3.18	35.56	6.0	2016	*	34202	---