


\*UPE/Put-Up upon Request

- ◆ UL listed SOOW-A (file no. E7362)
- ◆ CSA listed SOOW (file no. LL8825)
- ◆ OSHA acceptable
- ◆ Passes MSHA flame test (P-136-MSHA)

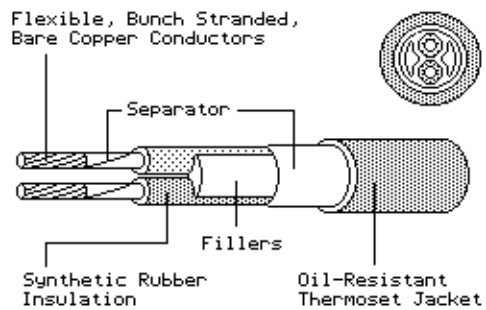

**PORTABLE CONTROL CABLE ◆ USA/Canada ◆ 600 Volts ◆ 105°C SOOW-A/90°C SOOW**

CatNo.	AWG	Stranding	Insul	Jackt	O.D.	Amp.	kg/km	UPE/Put-Up	P/N	Repl.
SO	12/2	65x30 AWG	1.14	2.41	14.35	25.0	282	1x 76m	20719	---
SO	12/3	65x30 AWG	1.14	2.41	14.99	25.0	343	1x 76m	20720	---
SO	12/4	65x30 AWG	1.14	2.41	16.26	20.0	420	1x 76m	20726	---
SO	12/5	65x30 AWG	1.14	2.41	17.91	16.0	521	*	22120	23076
SO	12/6	65x30 AWG	1.14	2.41	18.80	16.0	576	*	22121	23075
SO	12/7	65x30 AWG	1.14	2.41	18.80	16.0	615	*	34203	28040
SO	12/8	65x30 AWG	1.14	2.41	20.19	14.0	721	*	22122	23073
SO	12/9	65x30 AWG	1.14	2.41	21.59	14.0	789	*	34204	---
SO	12/10	65x30 AWG	1.14	2.41	22.48	14.0	862	*	22123	---
SO	12/12	65x30 AWG	1.14	2.41	23.62	10.0	1010	*	22124	---
SO	12/16	65x30 AWG	1.14	2.79	27.43	10.0	1329	*	31042	---
SO	12/20	65x30 AWG	1.14	2.79	29.59	10.0	1568	*	23802	---
SO	12/24	65x30 AWG	1.14	3.18	32.89	9.0	1792	*	32246	---
SO	12/30	65x30 AWG	1.14	3.18	36.20	9.0	2165	*	32247	---
SO	12/37	65x30 AWG	1.14	3.18	38.99	8.0	2606	*	32430	---