


\*UPE/Put-Up upon Request

- ◆ UL listed SOOW-A (file no. E7362)
- ◆ CSA listed SOOW (file no. LL8825)
- ◆ OSHA acceptable
- ◆ Passes MSHA flame test (P-136-MSHA)

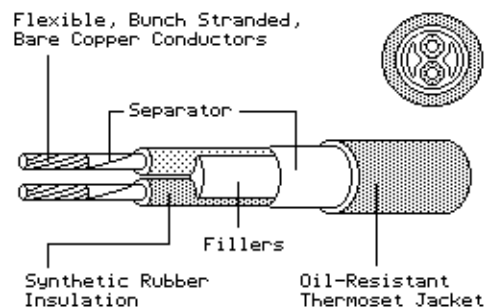

## PORTABLE CONTROL CABLE ◆ USA/Canada ◆ 600 Volts ◆ 105°C SOOW-A/90°C SOOW

CatNo.	AWG	Stranding	Insul	Jackt	O.D.	Amp.	kg/km	UPE/Put-Up	P/N	Repl.
SO	10/2	104x30 AWG	1.14	2.41	15.62	30.0	354	1x 76m	20730	---
SO	10/3	104x30 AWG	1.14	2.41	16.51	30.0	438	1x 76m	20731	---
SO	10/4	104x30 AWG	1.14	2.41	17.78	25.0	533	1x 76m	20734	---
SO	10/5	104x30 AWG	1.14	2.41	19.30	20.0	688	*	22125	22940
SO	10/6	104x30 AWG	1.14	2.41	20.70	20.0	763	*	24634	22941
SO	10/7	104x30 AWG	1.14	2.41	20.70	20.0	844	*	31931	---
SO	10/8	104x30 AWG	1.14	2.41	22.35	17.5	963	*	31932	23483
SO	10/9	104x30 AWG	1.14	2.41	23.88	17.5	1065	*	31933	---
SO	10/10	104x30 AWG	1.14	2.79	25.78	17.5	1157	*	31934	---
SO	10/12	104x30 AWG	1.14	2.79	26.92	12.5	1337	*	32243	---
SO	10/16	104x30 AWG	1.14	2.79	30.35	12.5	1680	*	32244	---
SO	10/20	104x30 AWG	1.14	3.18	33.66	12.5	2083	*	32245	---
SO	10/24	104x30 AWG	1.14	3.18	36.58	11.3	2633	*	33991	---
SO	10/30	104x30 AWG	1.14	3.18	40.13	11.3	3172	*	33992	---