




Dimensions = mm

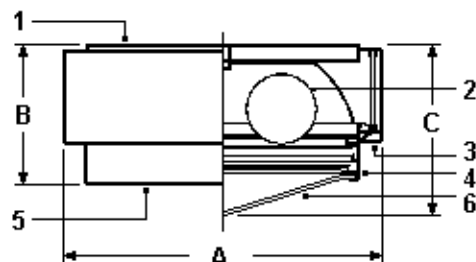

Square Ceiling Mounted Downlight  
Two or Four 60 Watt Incandescent  
Lamps (Please Order Separately).

Available in bronze (standard), white,  
or black finish (specify). Suitable  
for damp locations. UL and CSA Listed.

Catalog No.	Description	A	B	C	Wght/ea	UPE/Pack	EDP No
3601 WHT	Downlight for 2x 60W Lamps	286x286	124	161	3860g	10	113835
3603 WHT	Downlight for 4x 60W Lamps	356x356	129	205	4800g	10	113836
17745	Incandescent Lamp 60W 130V Medium Base, A-17 Bulb	---	---	---	40g	120/4	100163

(1) Extruded & mitered aluminum structural housing belt with steel reinforced corners. (2) Two or Four 60 Watt A-19 (max.) lamps (not furnished). (3) Safety bolt, injection molded nylon hinges and latches. Latches are activated by inconspicuous operation tabs. (4) Extruded aluminum lens frame hinges down for quick access to lamps. May be installed to hinge from any side of the housing. (5) Flat prismatic glass lens is supplied standard. (6) High strength pyramid shaped prismatic Lexan(R) lens supplied when unit ordered with vandal proof options. Vandal proof unit also includes tamper-proof lens frame. For vandal proof unit, suffix catalog number with "U".