


FUSE HOLDERS

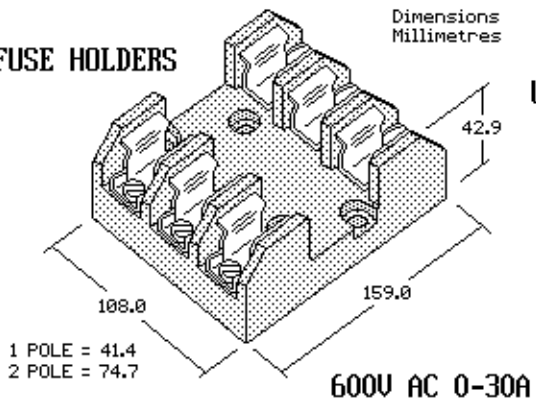


Base, General

Purpose Phenolic, 150°C, Class R
 Holders Have Been Tested and Approved
 for 200,000 Amp Interrupting Capacity,
 Holders Used with Fuses (Ø 20.6 x 127.0)mm

Note: Copper Box Connectors are available
 on 30 and 60 amp fuse holders only!

UL CSA

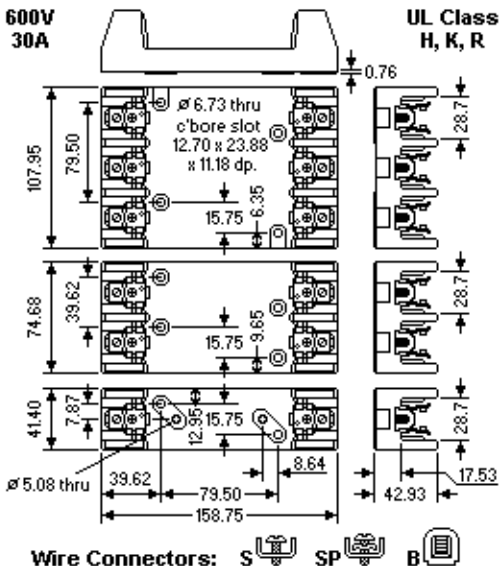

No. of Poles	Cat.No. Standard	Class H + K Reinforced	Cat.No. Class R	Wire Connector	Copper Wire Range (AWG)	UPE Packed
1	6F30A1BCU	R6F30A1BCU	6R30A1BCU	Copper Box	6 - 14	50
2	6F30A2BCU	R6F30A2BCU	6R30A2BCU	Copper Box	6 - 14	25
3	6F30A3BCU	R6F30A3BCU	6R30A3BCU	Copper Box	6 - 14	20