


## Grip-Tite Style up to SR-xxxx-1000, others Dual-Grommet Style

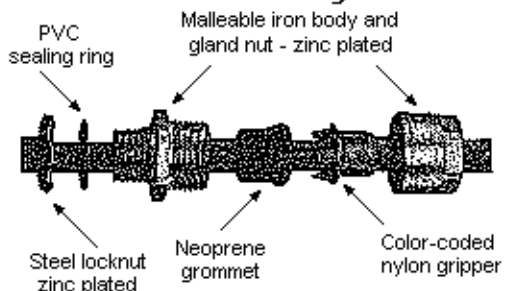

## TYPE SR GRIP-TITE(R) and DUAL-GROMMET STRAIN RELIEF CONNECTORS

Malleable Iron Body and Gland Nut, Nylon Gripper, Neoprene Grommet, PVC or Buna-N Sealing Ring, Steel Locknut

Zinc Plated On Body, Gland Nut & Locknut

- ◆ UL Listed and CSA Certified
- ◆ Liquidtight, oiltight, raintight
- ◆ Rated at 90°C
- ◆ Suitable for NEMA 4 enclosures and other wet locations

NPT	Catalog No.	Cat.No. 90°	Cord Range	UL Standard 514, CSA Standard C22.2#18, NEC Articles 400-10 and 400-14, NEMA Standards FB1-1983, Fed. Spec. W-C-586c, Mil. Spec. 100 and 130
1"	SR-100-750	--	15.9-19.1mm	Suitable for use in Hazardous Locations under NEC 501-4(b), 502-4(a) (2), and 503-3(a). For Class I Div. 2, Class II, Div. 1 and 2, and Class III, Div. 1 and 2.
1"	SR-100-875	SR-9100-875	19.1-22.2mm	
1"	SR-100-1000	SR-9100-1000	22.2-25.4mm	
1¼"	SR-125-1000	SR-9125-1000	22.2-25.4mm	
1½"	SR-150-1375	--	25.4-34.9mm	
2"	SR-200-1750	--	34.9-44.5mm	
2½"	SR-250-2000	--	41.3-50.8mm	
2½"	SR-250-2250	--	47.6-57.2mm	
3"	SR-300-2250	--	47.6-57.2mm	
3"	SR-300-2500	--	54.0-63.5mm	