


Metal Clad Sealing O-Rings

A = Inside Dia.
B = Outside Dia.
C = Thickness

Dimensions = mm

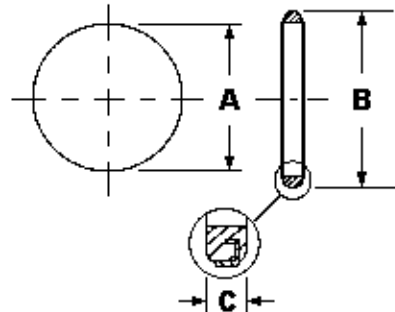

METAL CLAD SEALING O-RINGS -- Sizes 1/2" to 4" for use with NPT Fittings.

Sealing O-rings provide liquid-tight seal when fittings are installed in knock-outs. The neoprene ring is oil-resistant, as well as moisture resistant.

Catalog Number	for NPT Size	A	B	C	Wght/ea	UPE/Pack	EDP-No
----------------	--------------	---	---	---	---------	----------	--------

Zinc-Plated Steel with Neoprene Ring

205-09-001	1/2"	20.3	27.4	4.1	5g	100/50	116575
205-09-002	3/4"	25.4	34.0	4.1	7g	50/25	116576
205-09-003	1"	31.8	41.4	4.1	8g	50/25	116577
205-09-004	1 1/4"	40.9	50.8	4.1	16g	25/5	116578
205-09-005	1 1/2"	46.7	59.9	4.1	19g	25/5	116579
205-09-006	2"	58.7	71.9	4.1	22g	25/5	116580

Chrome Plated Steel with Neoprene Ring

205-09-007	2 1/2"	73.9	87.4	6.1	Please request for		
205-09-008	3"	89.4	103.6	6.1	informations and		
205-09-009	4"	115.3	134.6	7.4	availability!		