






ML1-P



ML2-C

Dimensions  
= mm

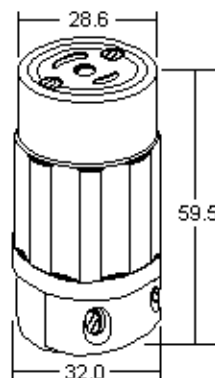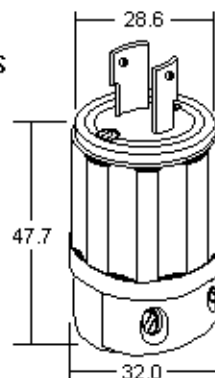

MIDGET LOCKING DEVICES offer smaller form factor for limited-space applications. Locking Plugs and Connectors feature heavy-duty construction for top performance in the environmental extremes of grueling industrial settings. Flanged Inlets and Outlets are built to endure hard use with rugged nylon flanges that assure a smooth, flush fit and outstanding resistance to cracking and breaking. All receptacles, plugs, connectors, inlets and outlets are designed to meet NEMA WD-6, and ANSI C-73, and to meet/exceed UL 498 standards. UL Fed.Spec. Listed WC-596 (File# E-13393), CSA Certified (File# LR-406) where applicable, NOM (Mexico) Certified, Environmental: Flammability per UL94 or CSA C22/06.

Cat.No	Ratings	Poles/Wires	Descript.	Cord Dia	Wght.EA	VPE/Pack	EDP No
ML1-P	15A 125V	2P 2W Non-Grnd.	Plug	5.2-10.9			
ML1-C	15A 125V	2P 2W Non-Grnd.	Connector	5.2-10.9			
ML2-P	15A 125V	2P 3W Grounding	Plug	5.2-10.9			
ML2-C	15A 125V	2P 3W Grounding	Connector	5.2-10.9			
ML3-P	15A 125/250V	3P 3W Non-Grnd.	Plug	5.2-10.9			
ML3-C	15A 125/250V	3P 3W Non-Grnd.	Connector	5.2-10.9			

Angle Plug/Connector, Plastic Flanged Inlet/Outlet, Metal Inlet/Outlet available