




Nylon Cable Clamps

- For clamping cable or tubing securely into place.
- Molded of nylon for resistance against corrosion, salt water, weak acids, gasoline, alcohol, oil, grease and common solvents.
- Conforms to the following mil spec: Mil Std 24E, Mil C-21565 (NAS), Mil P-17091-B.
- Molded of type 6/6 nylon. ASTN D-4066; flammability classification 94V-2.
- Temperature rating 85°C.



Recognized under the Component Program of Underwriters' Laboratories File #E-54523

Document	Catalog No. / Katalog-Nr.	UL Description	Screw Size	Color*	A	B	C	D	E	Weight/ea	VPE/Pack	U/M	EDP-No.
Nylon Cable Clamps, Series 33xx													
	3312 N	CCL125-170	8	Natural	8.7	9.5	1.3	3.2	4.3	1g	1000	ea	
	3302 N	CCL 1/8	10	Natural	8.7	9.5	1.3	3.2	5.2	1g	1000	ea	
	3302 W	CCL 1/8	10	White	8.7	9.5	1.3	3.2	5.2	1g	1000	ea	100679
	3313 N	CCL187-170	8	Natural	9.6	9.5	1.3	4.8	4.3	1g	1000	ea	
	3303 N	CCL 3/16	10	Natural	9.6	9.5	1.3	4.8	5.2	1g	1000	ea	
	3303 W	CCL 3/16	10	White	9.6	9.5	1.3	4.8	5.2	1g	1000	ea	100680
	3314 N	CCL250-170	8	Natural	10.7	9.5	1.3	6.4	4.3	1g	1000	ea	
	3304 N	CCL 1/4	10	Natural	10.7	9.5	1.3	6.4	5.2	1g	1000	ea	100681
	3315 N	CCL312-170	8	Natural	11.2	9.5	1.3	7.9	4.3	1g	1000	ea	
	3305 N	CCL 5/16	10	Natural	11.2	9.5	1.3	7.9	5.2	1g	1000	ea	
	3305 W	CCL 5/16	10	White	11.2	9.5	1.3	7.9	5.2	1g	1000	ea	100682
	3316 N	CCL375-170	8	Natural	11.8	9.5	1.3	9.5	4.3	1g	1000	ea	
	3306 N	CCL 3/8	10	Natural	11.8	9.5	1.3	9.5	5.2	1g	1000	ea	
	3306 W	CCL 3/8	10	White	11.8	9.5	1.3	9.5	5.2	1g	1000	ea	100683
	3317 N	CCL437-170	8	Natural	12.7	9.5	1.3	11.1	4.3	1g	1000	ea	
	3307 N	CCL 7/16	10	Natural	12.7	9.5	1.3	11.1	5.2	1g	1000	ea	
	3307 W	CCL 7/16	10	White	12.7	9.5	1.3	11.1	5.2	1g	1000	ea	100684
	3318 N	CCL500-170	8	Natural	13.5	9.5	1.3	12.7	4.3	1g	1000	ea	
	3308 N	CCL 1/2	10	Natural	13.5	9.5	1.3	12.7	5.2	1g	1000	ea	100685
	3322 N	---	10	Natural	9.1	12.7	1.5	2.9	5.2	2g	1000	ea	
	3323 N	---	10	Natural	10.7	12.7	1.5	4.4	5.2	2g	1000	ea	
	3324 N	CCH 1/4	10	Natural	11.1	12.7	1.5	6.4	5.2	2g	1000	ea	
	3325 N	CCH 5/16	10	Natural	12.0	12.7	1.5	7.9	5.2	2g	1000	ea	
	3326 N	CCH 3/8	10	Natural	12.7	12.7	1.5	9.5	5.2	2g	1000	ea	
	3327 N	CCH 7/16	10	Natural	13.5	12.7	1.5	11.1	5.2	2g	1000	ea	
	3328 N	CCH 1/2	10	Natural	14.1	12.7	1.5	12.7	5.2	2g	1000	ea	
	3329 N	CCH 9/16	10	Natural	15.3	12.7	1.5	14.3	5.2	2g	1000	ea	
	3330 N	CCH 5/8	10	Natural	15.9	12.7	1.5	15.9	5.2	2g	1000	ea	
	3331 N	CCH 11/16	10	Natural	16.9	12.7	1.5	17.4	5.2	2g	1000	ea	
	3332 N	CCH 3/4	10	Natural	17.8	12.7	1.5	19.1	5.2	2g	1000	ea	
	3333 N	CCH 13/16	10	Natural	19.9	12.7	1.5	20.6	5.2	2g	1000	ea	
	3334 N	CCH 7/8	10	Natural	20.2	12.7	1.5	22.2	5.2	3g	1000	ea	
	3340 N	CCH 1	10	Natural	20.9	12.7	1.5	25.4	5.2	3g	1000	ea	
	3342 N	CCH 1-1/8	10	Natural	23.8	12.7	1.5	28.6	5.2	3g	1000	ea	
	3343 N	CCH 1-3/16	10	Natural	24.5	12.7	1.5	30.1	5.2	3g	1000	ea	
	3344 N	CCH 1-1/4	10	Natural	24.9	12.7	1.5	31.8	5.2	3g	1000	ea	
	3346 N	CCH 1-3/8	10	Natural	26.5	12.7	1.5	34.9	5.2	3g	1000	ea	
	3348 N	CCH 1-1/2	10	Natural	28.3	12.7	1.5	38.1	5.2	3g	1000	ea	

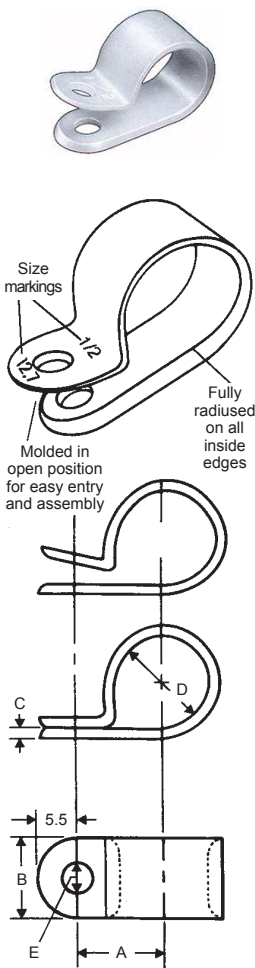

* Standard Colors: Black and Natural, Further Colors available on Request.

Nylon Cable Clamps


- For clamping cable or tubing securely into place.
- Molded of nylon for resistance against corrosion, salt water, weak acids, gasoline, alcohol, oil, grease and common solvents.
- Conforms to the following mil spec: Mil Std 24E, Mil C-21565 (NAS), Mil P-17091-B.
- Molded of type 6/6 nylon. ASTN D-4066; flammability classification 94V-2.
- Temperature rating 85°C.



Recognized under the Component Program of Underwriters' Laboratories File #E-54523



Document	Catalog No. / Katalog-Nr.	UL Description	Screw Size	Color*	A	B	C	D	E	Weight/ea	VPE/Pack	U/M	EDP-No.
Nylon Cable Clamps, Series 33xx													
	3362 B	CCL125-170	8	Black	8.7	9.5	1.3	3.2	4.3	1g	1000	ea	
	3352 B	CCL 1/8	10	Black	8.7	9.5	1.3	3.2	5.2	1g	1000	ea	
	3363 B	CCL187-170	8	Black	9.6	9.5	1.3	4.8	4.3	1g	1000	ea	
	3353 B	CCL 3/16	10	Black	9.6	9.5	1.3	4.8	5.2	1g	1000	ea	
	3364 B	CCL250-170	8	Black	10.7	9.5	1.3	6.4	4.3	1g	1000	ea	
	3354 B	CCL 1/4	10	Black	10.7	9.5	1.3	6.4	5.2	1g	1000	ea	
	3365 B	CCL312-170	8	Black	11.2	9.5	1.3	7.9	4.3	1g	1000	ea	
	3355 B	CCL 5/16	10	Black	11.2	9.5	1.3	7.9	5.2	1g	1000	ea	
	3366 B	CCL375-170	8	Black	11.8	9.5	1.3	9.5	4.3	1g	1000	ea	
	3356 B	CCL 3/8	10	Black	11.8	9.5	1.3	9.5	5.2	1g	1000	ea	
	3367 B	CCL437-170	8	Black	12.7	9.5	1.3	11.1	4.3	1g	1000	ea	
	3357 B	CCL 7/16	10	Black	12.7	9.5	1.3	11.1	5.2	1g	1000	ea	
	3368 B	CCL500-170	8	Black	13.5	9.5	1.3	12.7	4.3	1g	1000	ea	
	3358 B	CCL 1/2	10	Black	13.5	9.5	1.3	12.7	5.2	1g	1000	ea	
	3372 B	---	10	Black	9.1	12.7	1.5	2.9	5.2	2g	1000	ea	
	3373 B	---	10	Black	10.7	12.7	1.5	4.4	5.2	2g	1000	ea	
	3374 B	CCH 1/4	10	Black	11.1	12.7	1.5	6.4	5.2	2g	1000	ea	
	3375 B	CCH 5/16	10	Black	12.0	12.7	1.5	7.9	5.2	2g	1000	ea	
	3376 B	CCH 3/8	10	Black	12.7	12.7	1.5	9.5	5.2	2g	1000	ea	
	3377 B	CCH 7/16	10	Black	13.5	12.7	1.5	11.1	5.2	2g	1000	ea	
	3378 B	CCH 1/2	10	Black	14.1	12.7	1.5	12.7	5.2	2g	1000	ea	
	3379 B	CCH 9/16	10	Black	15.3	12.7	1.5	14.3	5.2	2g	1000	ea	
	3380 B	CCH 5/8	10	Black	15.9	12.7	1.5	15.9	5.2	2g	1000	ea	
	3381 B	CCH 11/16	10	Black	16.9	12.7	1.5	17.4	5.2	2g	1000	ea	
	3382 B	CCH 3/4	10	Black	17.8	12.7	1.5	19.1	5.2	2g	1000	ea	
	3383 B	CCH 13/16	10	Black	19.9	12.7	1.5	20.6	5.2	2g	1000	ea	
	3384 B	CCH 7/8	10	Black	20.2	12.7	1.5	22.2	5.2	3g	1000	ea	
	3390 B	CCH 1	10	Black	20.9	12.7	1.5	25.4	5.2	3g	1000	ea	
	3392 B	CCH 1-1/8	10	Black	23.8	12.7	1.5	28.6	5.2	3g	1000	ea	
	3393 B	CCH 1-3/16	10	Black	24.5	12.7	1.5	30.1	5.2	3g	1000	ea	
	3394 B	CCH 1-1/4	10	Black	24.9	12.7	1.5	31.8	5.2	3g	1000	ea	
	3396 B	CCH 1-3/8	10	Black	26.5	12.7	1.5	34.9	5.2	3g	1000	ea	
	3398 B	CCH 1-1/2	10	Black	28.3	12.7	1.5	38.1	5.2	3g	1000	ea	

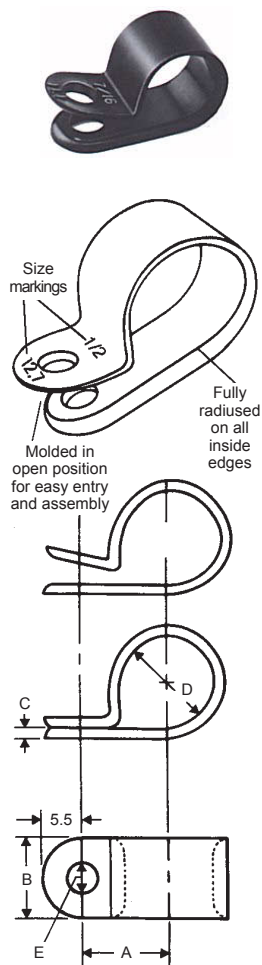

* Standard Colors: Black and Natural, Further Colors available on Request.