

SemiStat® Status Indicator LED Type, Models SCB and SCC



SCC-024QC



SCB-024TC

The SemiStat® Status Indicator series is designed to meet the needs of the OEM market, the SemiStat is an attractive, easy-to-install and economical status indicator.

SemiStats operate on 24VAC or 24VDC. The snap fit housing cover and a standard terminal block make the installation and wiring of the SemiStat® a quick job.

The attractive and durable ABS housing is available with either a white or “chrome” finish to complement the machine or location of installation.

SemiStat® LED light modules utilize extremely bright light emitting diodes for the greatest attention-getting affect. Tri-Color SemiStat® features red, amber and green light modules and Quad Color SemiStat® features red, amber, green and blue light modules. Clear LED light modules are available separately. The sequence of the LED light modules can be easily changed to suit the application – just pop off the housing cover, disconnect the modules and then reconnect in the desired order. Light modules can be set to flashing or steady burning mode.

For further utility, each SemiStat is equipped with an integrated piezo sounder. SemiStat sounders produce 60dB at ten feet. A selection of two beep patterns is offered.


OEM STATUS INDICATOR

- Available in 24VAC/VDC
- Tri or quad-color models
- Available in chrome or white finish
- 100,000 hour vibration resistant LED lamps
- Integrated sounder
- Surface mount
- Indoor use only

Catalog Number	Model	Voltage	Operating Current	Decibels at 10ft / 1m	Mount	EDP-Nr.
SCB-024QC	Quad-color	24VAC/DC	175 mA*	60db / 70db	Surface	125331
SCB-024TC	Tri-color	24VAC/DC	150 mA*	60db / 70db	Surface	124155
SCC-024QC	Quad-color	24VAC/DC	175 mA*	60db / 70db	Surface	125332
SCC-024TC	Tri-color	24VAC/DC	150 mA*	60db / 70db	Surface	123998

* Amp draw measured with all colors and sounder activated simultaneously.

SemiStat® Status Indicator LED Type, Models SCB and SCC

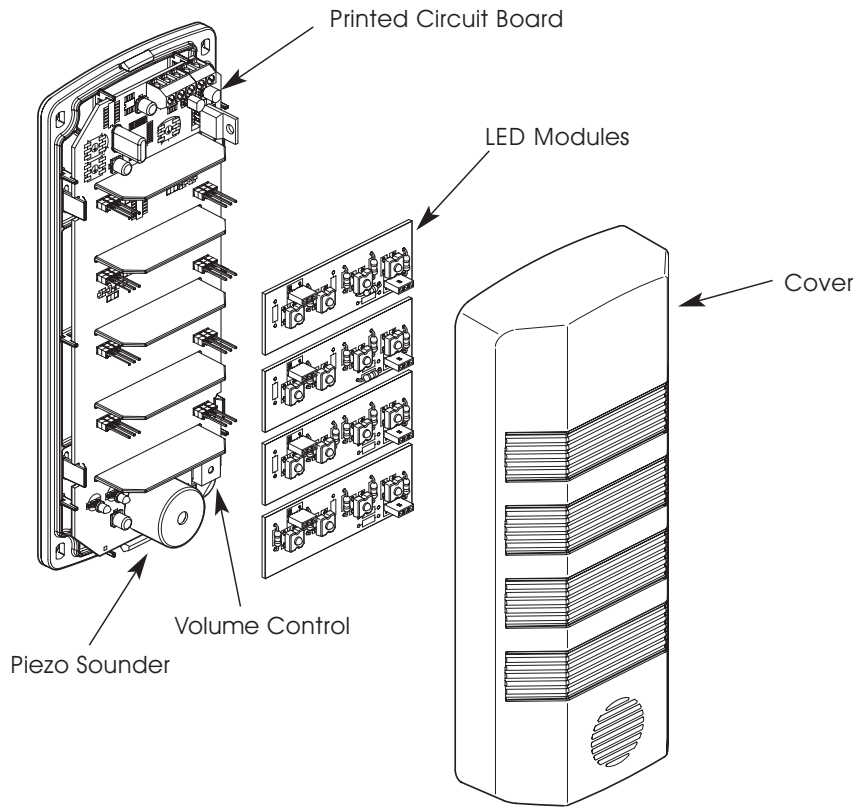

SPECIFICATIONS

	LED Lamp	LED Lamp
Lamp Style:	LED Lamp	LED Lamp
Lamp Life:	100,000 hours	100,000 hours
Operating Temperature:	32°F to 140°F	0°C to 60°C
Net Weight:	0.7 lbs.	0.32 kg
Shipping Weight:	1.0 lbs.	0.45 kg
Height:	8.14"	207.0 mm
Width:	3.55"	90.0 mm
Depth:	1.55"	39.0 mm

HOW TO ORDER

- Specify model and tri- or quad color
- Specify finish
White/Beige (B) or Chrome (C)

REPLACEMENT PARTS

<u>Description</u>	<u>Part Number</u>	<u>Description</u>	<u>Part Number</u>
PCB Assembly	K2001958A	LED Module, Red	K2001925A
LED Module, Amber	K2001925A-01	LED Module, Green	K2001925A-03
LED Module, Blue	K2001925A-02	LED Module, Clear	K2001925A-04