

Mounting Kits

Models LWMB2 and LCMB2

- Heavy-duty construction
- Easy installation
- For walls and outside corners
- Indoor and outdoor use
- Replaces unsightly and hazardous makeshift supports
- 1/2-inch, 3/4-inch and 1-inch pipe mount
- Type 3R



Catalog No.	Description	Height	Width	Extension	Wght/ea	EDP-No.
LCMB2	Mounting bracket, corner	6" (152.4 mm)	5" (127.0 mm)	5 3/4" (146.1 mm)	1044 g	110661
LWMB2	Mounting kit, wall mount	6" (152.4 mm)	6 3/8" (161.9 mm)	5 7/8" (149.2 mm)	1180 g	110684

Models LWMB2 and LCMB2 mounting brackets are specifically designed for use with stationary warning lights to provide an easy and consistent means of mounting lights throughout a facility.

Models LWMB2 and LCMB2 are constructed of durable cast aluminum and sealed with gray powder coat paint. Easy to install, these units can be wired through the back of the bracket for electrical box mounting or through the threaded hole in the base for external 1/2-inch conduit connection. Each kit includes a bracket, plate and mounting screws.

Easy installation, heavy-duty construction and a professional appearance make the brackets suitable for use in commercial, institution and industrial environments.

These brackets are suitable for any Type 3R application in ordinary (non Division 1/Division 2) environments.


The LCMB2 and LWMB2 mounting kits may be used with the following models:

121S, 131ST, 131DST, 131C, 141(120V), 141ST, 224XST, 225, 225X, 225XST, 225XL, 371, 371L, 371ST, 371DST, AV1, AV1ST, FB2PST and the FB24ST.

To learn more about B-I-A please visit us at our
WEB site: www.BiaGmbH.com



MOUNTING KITS (LWMB2, LCMB2)

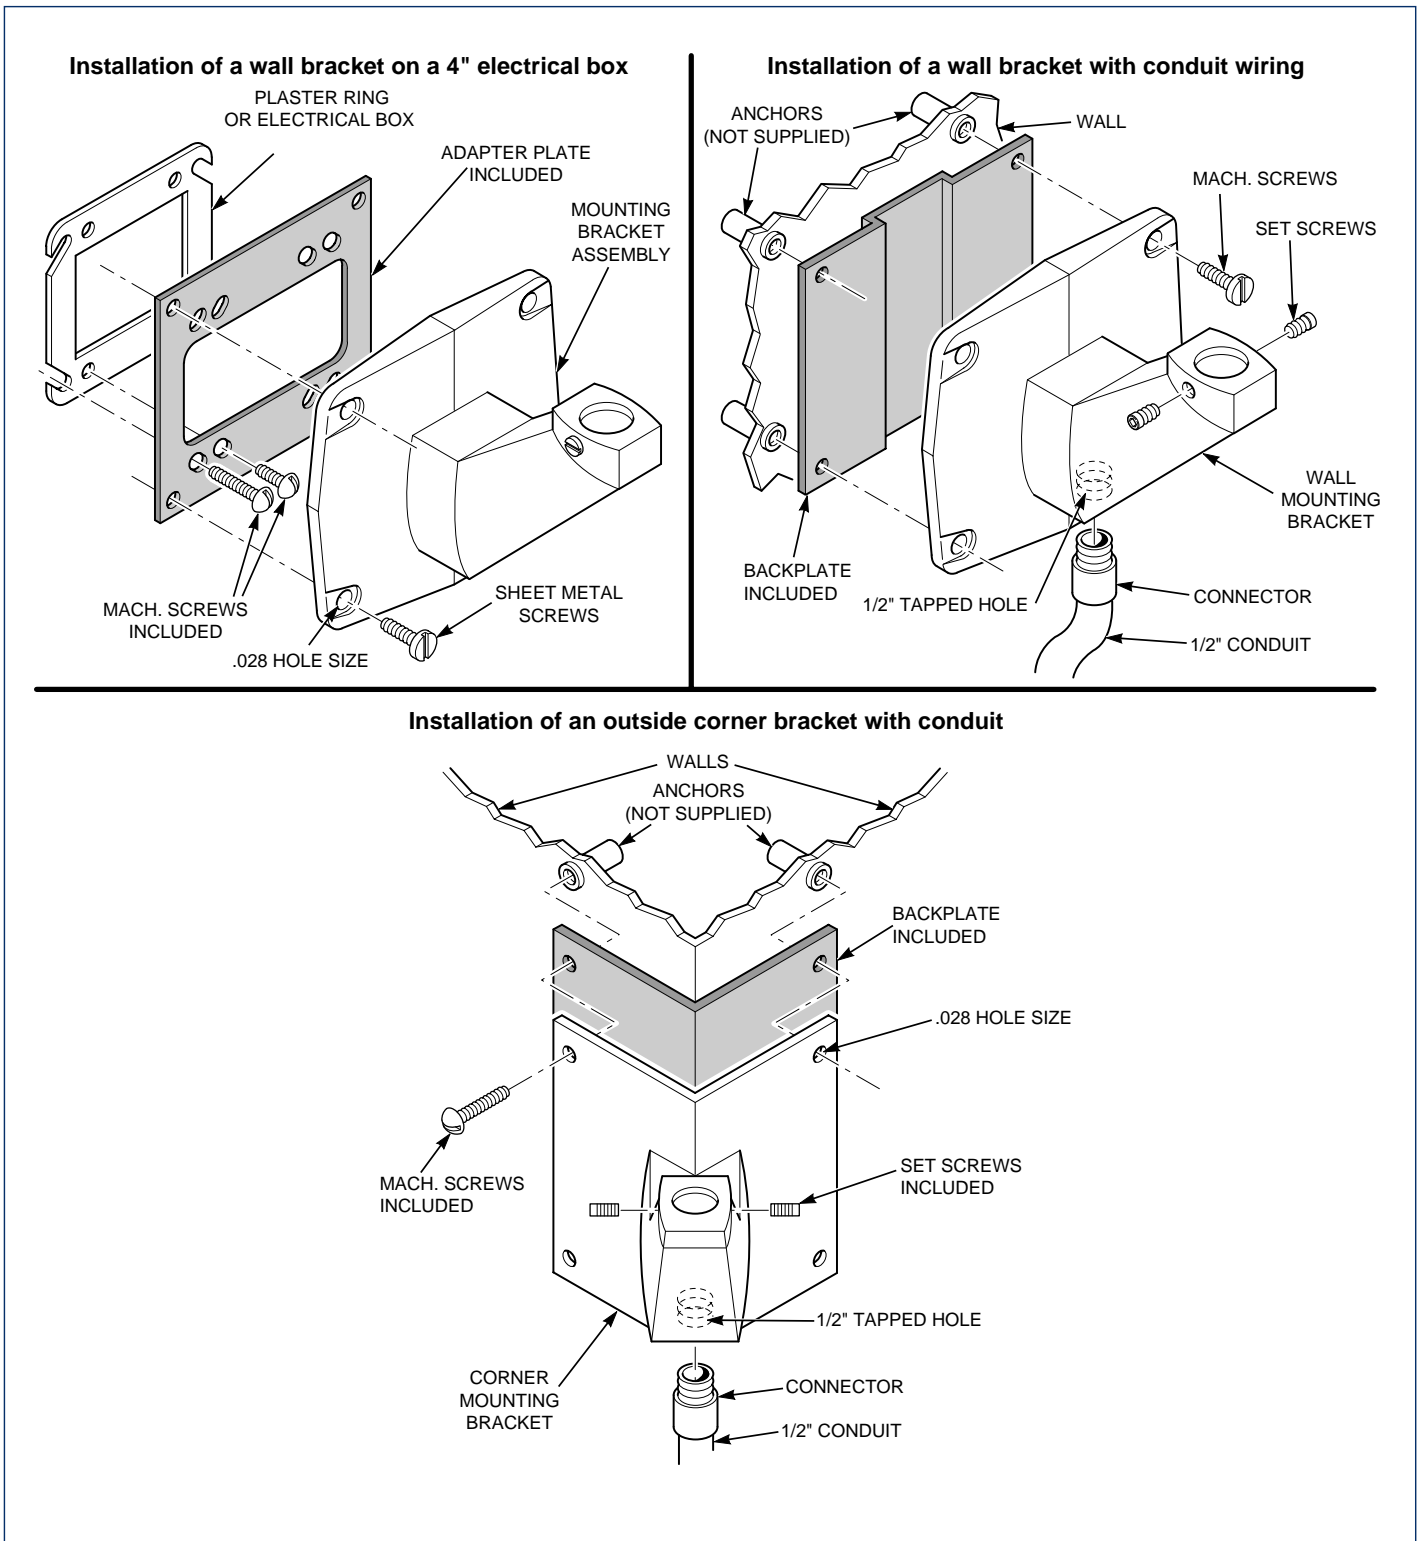

HOW TO ORDER

- Specify model
LCMB2 – Corner Mount
LWMB2 – Wall Mount