

USA / Canada - AudioMaster® Light Duty Two-Way Intercom

Model 310LD-MV

A LIGHT-DUTY TWO-WAY INTERCOM WITH SUPERIOR SOUND QUALITY

- Balanced line output
- Gain control
- Remote device activation
- Multi-voltage design accepts 24VDC, 120VAC and 240VAC
- UL Listed, CSA Certified
- TYPE 1, IP10 enclosure



Catalog No.	Voltage	Operating Current	Sys. Standby Current	Frequency Response (-6dB)	Input Impedance	VPE/Pack	EDP-No.
310LD-MV	24VDC	120mA	60mA	250Hz-5KHz	3400 ohms	1 ea	122589
	120VAC 50/60Hz	80mA	60mA	250Hz-5KHz	3400 ohms		
	240VAC 50/60Hz	40mA	30mA	250Hz-5KHz	3400 ohms		

Description


The AudioMaster® light-duty industrial intercom provides reliable two-way communications and superior sound quality. The AudioMaster® 310LD-MV's standard features include internal volume control, balanced line output, Type 1 wall mount housing, integrated call/listen/talk switch, remote device activation, and the ability to power another intercom at 24VDC. 310LD-MV operates from -31°F to 150°F (-35°C to 66°C) for indoor applications. An integrated remote device activation feature allows you to activate an auxiliary signal such as a horn or light. The AudioMaster® 310LD-MV requires 24VDC, 120VAC or 240VAC to power each unit. The intercom is easy to operate. Press the switch down to talk and release to listen. The AudioMaster® Model 310LD-MV is UL Listed and CSA Certified. The Model 310LD-MV is ideal for office environments and other dry, non-hazardous locations or anywhere reliable two-way communication is important for a safe efficient operation.

To learn more about B-I-A please visit us at our
WEB site: www.BiaGmbH.com



USA / Canada - AudioMaster® Light Duty Two-Way Intercom

Model 310LD-MV

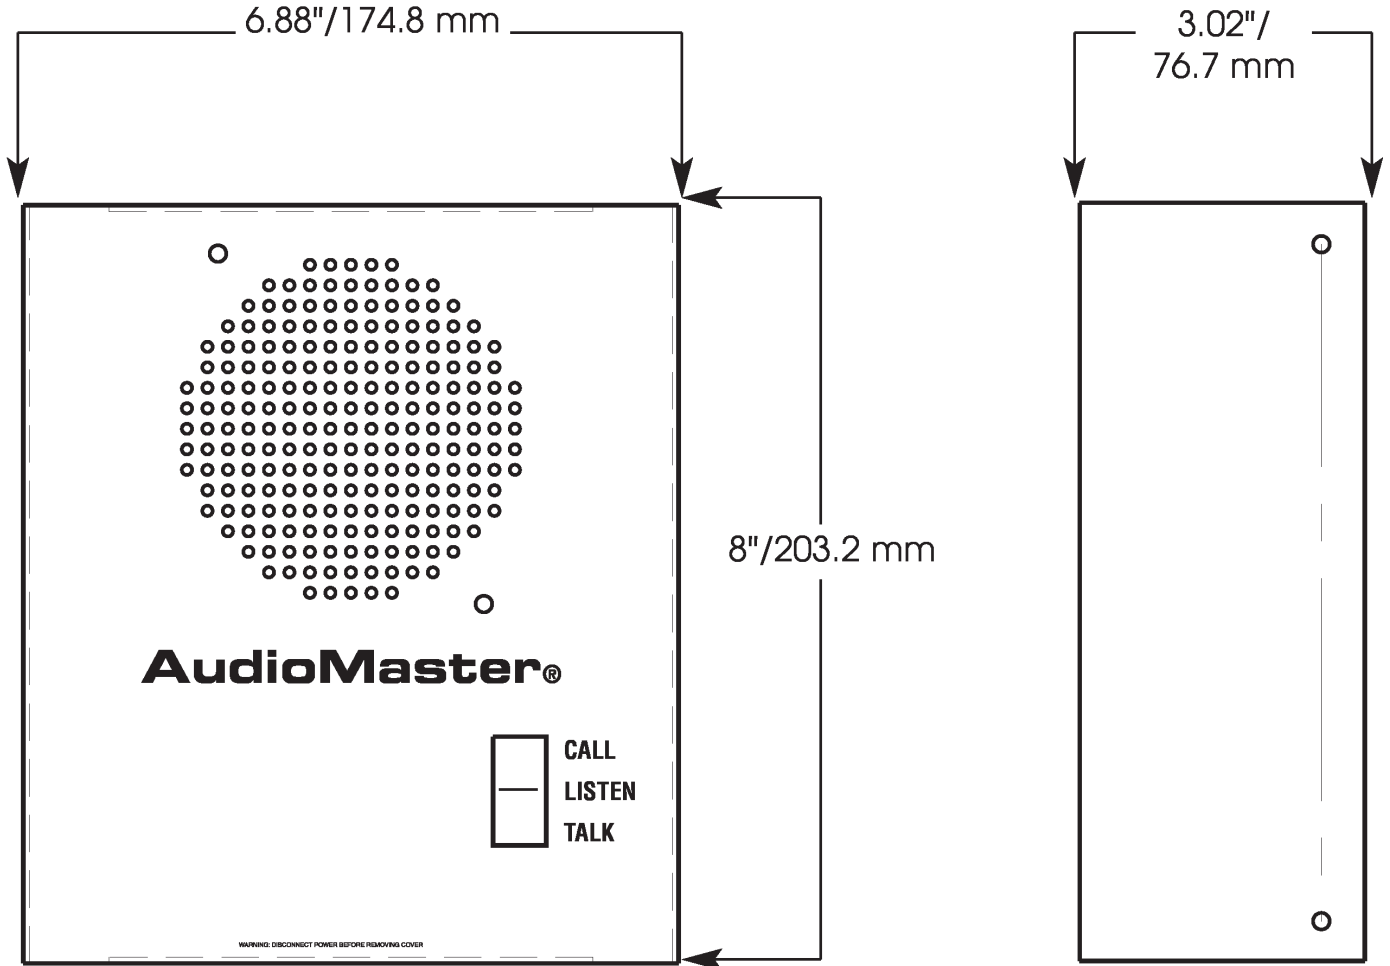

SPECIFICATIONS

Speaker Rating:	2 watts	2 watts
Operating Temperature:	-31°F to 150°F	-35°C to 66°C
Net. Weight:	3.2 lbs	1.45 kg
Shipping Weight:	3.9 lbs.	1.77 kg
Height:	8.0"	203.2 mm
Width:	6.88"	174.8 mm
Depth:	3.02"	76.7 mm

HOW TO ORDER

- Specify model number

REPLACEMENT PARTS

<u>Description</u>	<u>Part Number</u>
PC Board Assembly	K2001290B
Resistor, 1K, 1W	K101216A
Fuses — F1, 250V	K144A125A
Switch	K122283A