



30 AMP

Straight Blade Devices, 30 Amp.

- Double-wipe copper alloy contacts ensure dependable electrical connections.
- Clamp-type terminal screws are color coded, backed out and staked for fast installation.
- Internal sealing diaphragm resists matter from entering wiring area.

C530DF

P530DF



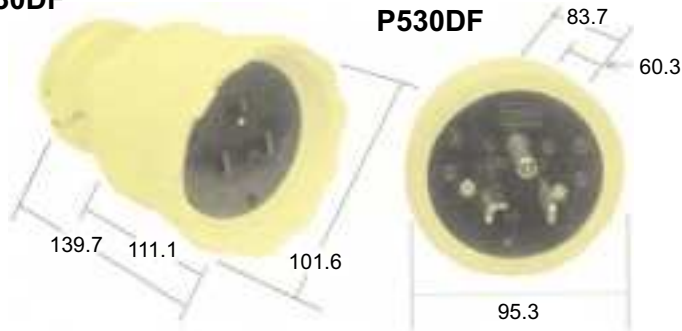


C530DF and P530DF

- 125 Volt AC NEMA 5-30
2-Pole, 3-Wire Grounding Devices

C630DF

P630DF


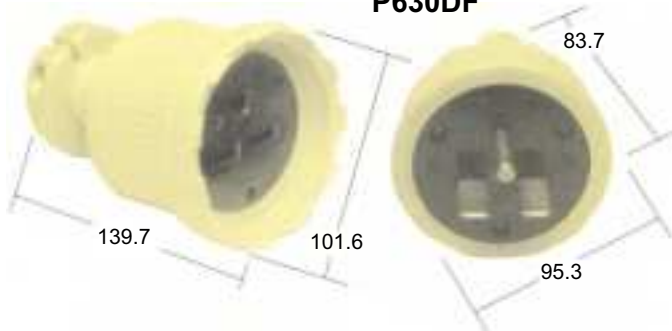


C630DF and P630DF

- 250 Volt AC NEMA 6-30
2-Pole, 3-Wire Grounding Devices



C1030DF

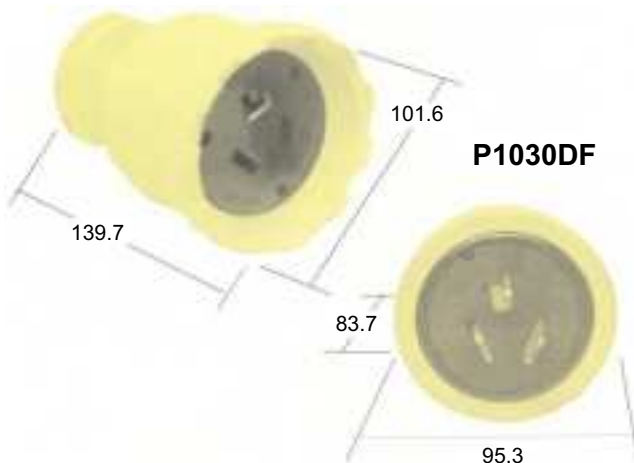P1030DF



C1030DF and P1030DF

- 125/250 Volt AC NEMA 10-30
3-Pole, 3-Wire Non-Grounding

Document	Catalog No. / Katalog-Nr.	Description / Beschreibung	Weight/ea	VPE/Pack	U/M	EDP-No.
Straight Blade Plug and Connector, 30 Amp						
All Plugs & Connectors are   Listed * Certified Grounded Items ONLY	P530DF*	Plug, NEMA 5-30P, Dura-Tex Flip Seal, Cord Hole ø 25.4 mm	908g	10	ea	
	C530DF*	Connector, NEMA 5-30R, Dura-Tex Flip Seal, Cord Hole ø 25.4 mm	1362g	10	ea	
	P630DF*	Plug, NEMA 6-30P, Dura-Tex Flip Seal, Cord Hole ø 25.4 mm	908g	10	ea	
	C630DF*	Connector, NEMA 6-30R, Dura-Tex Flip Seal, Cord Hole ø 25.4 mm	1362g	10	ea	
	P1030DF	Plug, NEMA 10-30P, Dura-Tex Flip Seal, Cord Hole ø 25.4 mm	908g	10	ea	
	C1030DF	Connector, NEMA 10-30R, Dura-Tex Flip Seal, Cord Hole ø 25.4 mm	1362g	10	ea	