

Europe - Metal Threaded Reducers Metric/Metric

Explosion Protection

⊕ II 2 G Ex e II or Ex d IIA / IIB / IIC

Certificates

PTB 02 ATEX 1067 U (other: IEC Ex)

Materials

Galvanized Steel (Standard Version, shown below)


Nickel-Plated Brass and Stainless Steel Versions available on request, contact our Sales Office.



Catalog Number Galvanized Steel	External Thread	Internal Thread	Dimensions (mm)					approx. Weight/ea	Standard VPE / Packed
			A/F	B	A	D	E		
82951.01.2016	M 20 x 1.5	M 16 x 1.5	27	—	27	14	24	0.053 kg	200/10 ea
82951.01.2516	M 25 x 1.5	M 16 x 1.5	32	—	32	14	24	0.080 kg	200/10 ea
82951.01.2520	M 25 x 1.5	M 20 x 1.5	32	—	32	14	24	0.073 kg	200/10 ea
82951.01.3220	M 32 x 1.5	M 20 x 1.5	41	—	41	14	24	0.098 kg	200/10 ea
82951.01.3225	M 32 x 1.5	M 25 x 1.5	41	—	41	14	24	0.130 kg	100/10 ea
82951.01.3324	M 33 x 1.5	M 24 x 1.5	41	—	41	14	24	0.100 kg	100/10 ea
82951.01.4032	M 40 x 1.5	M 32 x 1.5	50	—	50	14	24	0.265 kg	100/10 ea
82951.01.4842	M 48 x 1.5	M 42 x 1.5	55	—	55	14	24	0.104 kg	100/10 ea
82951.01.5040	M 50 x 1.5	M 40 x 1.5	60	—	60	14	24	0.176 kg	100/10 ea
82951.01.5648	M 56 x 1.5	M 48 x 1.5	65	—	65	14	24	0.160 kg	100/10 ea
82951.01.6350	M 63 x 1.5	M 50 x 1.5	75	—	75	14	24	0.130 kg	50/5 ea
82951.01.7563	M 75 x 1.5	M 63 x 1.5	85	—	85	14	24	0.203 kg	50/5 ea
82951.01.9075	M 90 x 1.5	M 75 x 1.5	100	—	100	14	24	0.313 kg	25/5 ea

Dimensional Data:

A/F indicates
Across Flats
(SW)

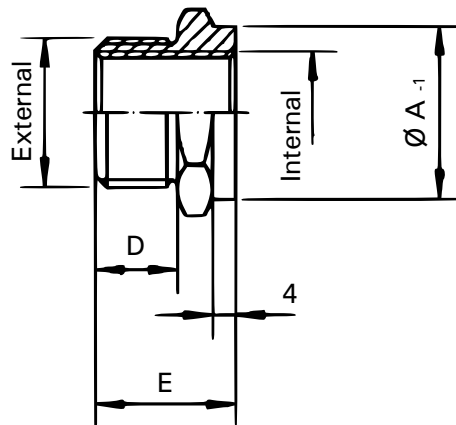

Specifications and dimensions subject to change without notice. Dimensions in mm.

Europe / USA - Metal Threaded Adaptors Metric/NPT

Explosion Protection

Ex II 2 G Ex e II or Ex d IIA / IIB / IIC

Certificates

PTB 02 ATEX 1067 U (other: IEC Ex)

Materials

Galvanized Steel (Standard Version, shown below)


Nickel-Plated Brass and Stainless Steel Versions available on request, contact our Sales Office.



Catalog Number Galvanized Steel	External Thread	Internal Thread	Dimensions (mm)					approx. Weight/ea	Standard VPE / Packed
			A/F	B	A	D	E		
82951.11.20038	M 20 x 1.5	NPT 3/8"	24	—	24	5	29	0.030 kg	100/10 ea
82951.11.25050	M 25 x 1.5	NPT 1/2"	30	—	30	5	29	0.049 kg	100/10 ea
82951.11.32075	M 32 x 1.5	NPT 3/4"	36	—	36	5	29	0.072 kg	50/10 ea
82951.11.40100	M 40 x 1.5	NPT 1"	46	—	46	5	29	0.122 kg	50/10 ea
82951.11.50125	M 50 x 1.5	NPT 1 1/4"	55	—	55	7	31	0.150 kg	25/5 ea
82951.11.63150	M 63 x 1.5	NPT 1 1/2"	70	—	70	7	31	0.295 kg	25/5 ea
82951.11.75200	M 75 x 1.5	NPT 2"	80	—	80	7	39	0.445 kg	10/5 ea

Dimensional Data:

A/F indicates
Across Flats
(SW)

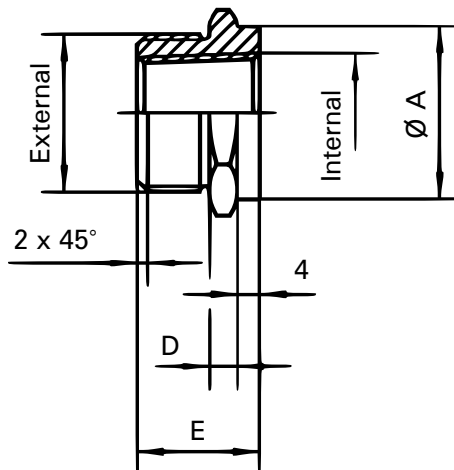

Specifications and dimensions subject to change without notice. Dimensions in mm.

USA / Europe - Metal Threaded Adaptors NPT/Metric

Explosion Protection

⊕ II 2 G Ex e II or Ex d IIA / IIB / IIC

Certificates

PTB 02 ATEX 1067 U (other: IEC Ex)

Materials

Galvanized Steel (Standard Version, shown below)


Nickel-Plated Brass and Stainless Steel Versions available on request, contact our Sales Office.



Catalog Number Galvanized Steel	External Thread	Internal Thread	Dimensions (mm)					approx. Weight/ea	Standard VPE / Packed
			A/F	B	A	D	E		
82951.21.03810	NPT 3/8"	M 10 x 1.5	19	2	—	6	27.5	0.040 kg	100/10 ea
82951.21.05010	NPT 1/2"	M 10 x 1.5	22	2	—	10	35.5	0.056 kg	100/10 ea
82951.21.07516	NPT 3/4"	M 16 x 1.5	27	2	—	11	37	0.066 kg	100/10 ea
82951.21.07520	NPT 3/4"	M 20 x 1.5	27	2	—	11	37	0.081 kg	100/10 ea
82951.21.10020	NPT 1"	M 20 x 1.5	36	2.5	—	12	42	0.209 kg	50/10 ea
82951.21.10025	NPT 1"	M 25 x 1.5	36	2.5	—	12	42	0.160 kg	50/10 ea
82951.21.12532	NPT 1 1/4"	M 32 x 1.5	46	2.5	—	14	45	0.170 kg	50/10 ea
82951.21.15032	NPT 1 1/2"	M 32 x 1.5	50	2.5	—	17	48	0.295 kg	25/5 ea
82951.21.20050	NPT 2"	M 50 x 1.5	65	2.5	—	18	50	0.270 kg	25/5 ea

Dimensional Data:

A/F indicates
Across Flats
(SW)

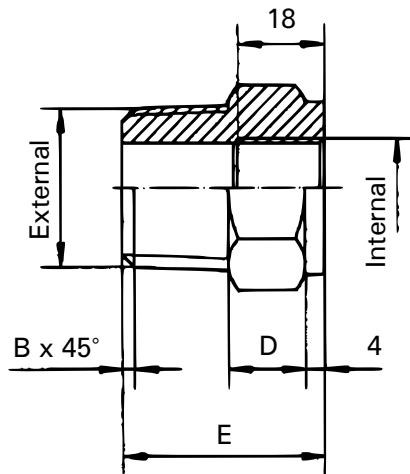

Specifications and dimensions subject to change without notice. Dimensions in mm.