



Vitalite® Rotating Warning Light

Model 121A

LIGHT DUTY VEHICULAR LIGHT


- Available in 12VDC and 24VDC
- Five dome colors
- Surface mount
- NEMA 3R, IP45 enclosure

The Federal Signal Vitalite® 121A is a compact, rotating light designed for vehicular applications. It features a parabolic reflector that rotates around an incandescent lamp, providing 60 flashes per minute in all directions. The 121A is available in five dome colors — amber, blue, clear, green and red.

The 121A is a surface mounted visual signal. A single wire is connected to the plus side of the battery source. The chassis of the light provides grounding. A simple on/off pull switch for activation is included. The 121A is available in 12VDC and 24VDC.

Model	Voltage	Operating Current	Flash Rate/Minute	Candlepower	Mount
121A	12VDC	3.0 amps	60	4,000	Surface
121A	24VDC	0.9 amps	60	4,000	Surface

VITALITE® ROTATING WARNING LIGHT (121A)

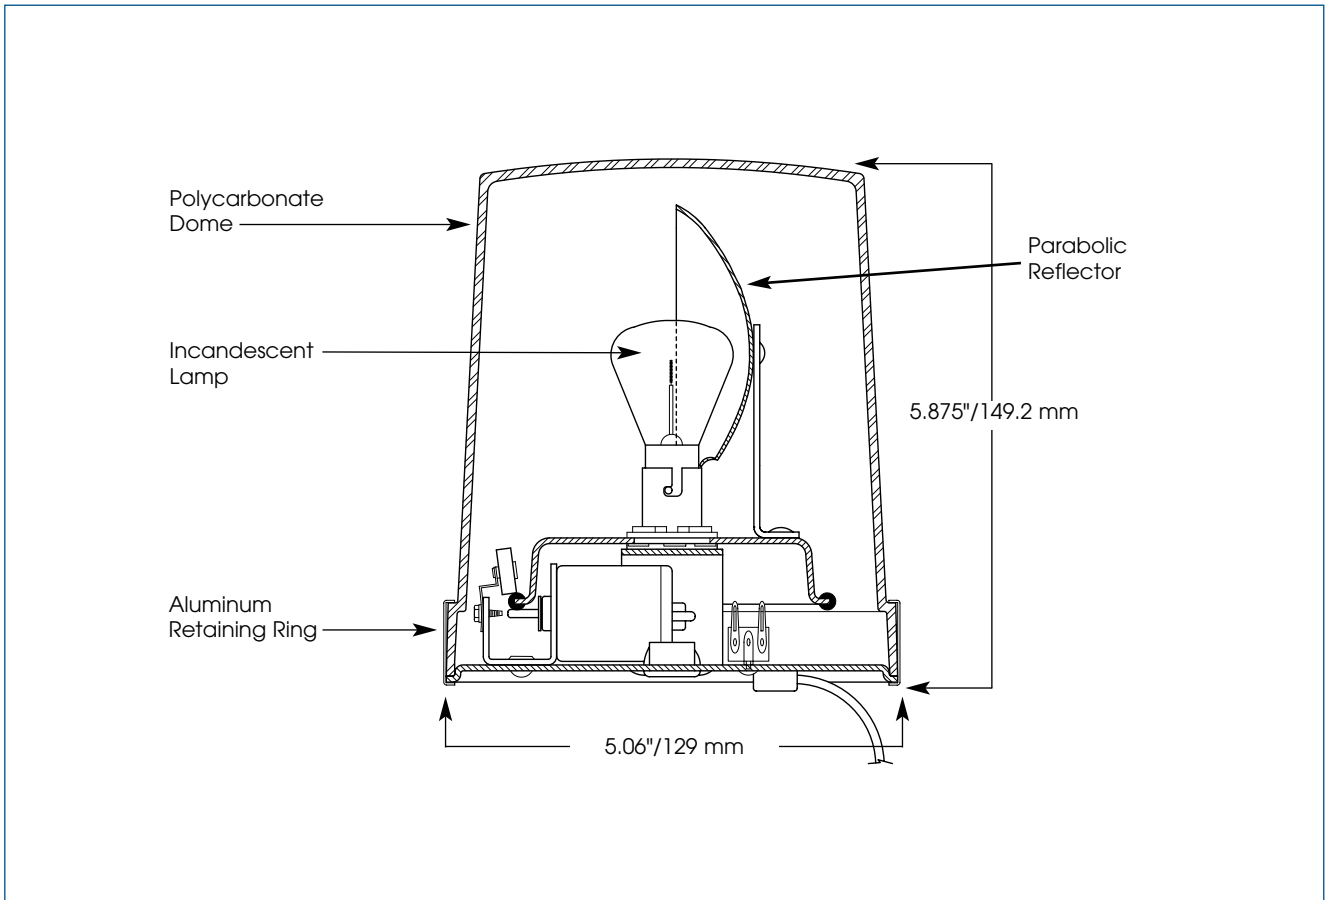

SPECIFICATIONS

Lamp Life*:	200 Hours	200 Hours
Lamp Style:	Incandescent	Incandescent
Operating Temperature:	-32°F to 120°F	-36°C to 49°C
Net Weight:	2.0 lbs.	0.91 kg
Shipping Weight:	1.35 lbs.	0.61 kg
Height:	5.875"	149.2 mm
Diameter:	5.06"	129 mm

* Optimal hours under ideal conditions.

HOW TO ORDER

- Specify model, voltage and color

REPLACEMENT PARTS

<u>Description</u>	<u>Part Number</u>	<u>Description</u>	<u>Part Number</u>
Dome, Amber	K8444B019A-12	Dome, Red	K8444B019A-11
Dome, Blue	K8444B019A-13	Incandescent Lamp, 12VDC	K8440A108
Dome, Clear	K8444B019A-14	Incandescent Lamp, 24VDC	K8107A045
Dome, Green	K8444B019A-15	Retaining Band	K8444A034D
Dome, Magenta	K8444B019A-17		