

Installation Tools

SPIN-IT




With the SPIN-IT, the conduit can be tightened much faster than with conventional tools. Because SPIN-IT never touches the coating, damage to the conduit is eliminated. SPIN-IT is available in popular sizes for 3/4" through 2" drive conduit. Use 1/2" drive impact wrench or a standard ratchet wrench for 3/4" and 1" conduit, use 3/4" drive for sizes 1-1/4" through 2".

PLASTI-SOCKET



PLASTI-SOCKET is a fiber-glass encapsulated 3/8" drive socket for use with the square fiberglass encapsulated U bolt and beam clamp nuts used in the original conduit support system. They fit a standard 3/8" drive ratchet and speed up installation while avoiding coating damage from metal sockets, pliers or wrenches.

Z-WRENCH

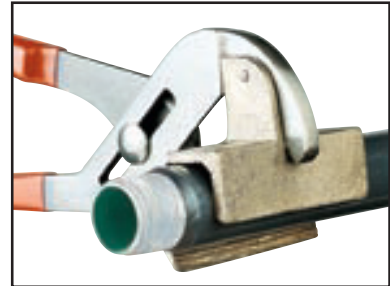

Z-WRENCH features extra wide jaws which spread the clamping force, enabling the tool to grip without marring the surface of the conduit. The "V" shaped upper jaw allows Z-WRENCH to accommodate a wide range of conduit sizes. Shallow grooves in the upper and lower jaws provide an excellent grip.

JPZ 1 - 1/2"-1-1/4"
JPZ 2 - 1-1/2"-2-1/2"

JAWS 3



JAWS 3 are a set of aluminum-nickel-bronze vise jaws designed to replace the regular jaws in a RIGID #23 or #40-A pipe vise. JAWS 3 are designed for use with PVC Coated Conduit. They completely protect the exterior coating from damage caused by the vise jaws when cutting or threading. One set of JAWS 3 handles PVC Coated Conduit sizes from 1/2" through 1-1/2". Model #23 fits the RIGID #23 pipe vise. Model #40-A fits the RIGID #40-A tripod pipe vise.

HALF SHELL CLAMPS



HALF SHELL CLAMPS are designed to cover a large surface area when clamping conduit, especially in a chain vise. This allows for a strong grip without damaging the exterior coating. HALF SHELL CLAMPS are available for clamping 2" through 6" conduit.

HICKEY



This Hickey is a special bending tool with a 40 mil PVC coating which reduces the possibility of damage during conduit bending.

Please request for Installation Tools catalog numbers

TOUCH UP COMPOUNDS

Touchup Compounds are available to repair minor damage to the interior urethane or exterior PVC factory coatings. The exterior PVC touchup compound is gray and available in a 12 oz. aerosol can, a pint can with brush-top applicator, and a 1 gallon can. The interior green urethane touchup compound is available in a quart can. See the installation section (Document #7225) for more information on using the touchup compounds.

TOUCH-UP COMPOUNDS

Catalog Number	DESCRIPTION	Size
TC-1700	Exterior Spray Type (Gray)	12 oz.
TC-1600	Exterior Non-Spray with Brush-Top (Gray)	1 pt.
TC-1800	Exterior Non Spray (Gray)	1 gal.
TC-2500	Green Interior Touch-Up	1 qt.