

**MODULAR TELEPHONE CABLE**  
**UNSHIELDED**  
**PVC/PE**

**SILVER SATIN**  
**150 VOLT**

### CHARACTERISTICS

**Operating Temperature:**

- 60°C

**Voltage Rating:**


- 150 Volt

**Color Description:**

- Color Code: Chart #251 below
- Jacket Color: Gray Silver Satin

**Product Description:**

- Conductor:  
Stranded Bare Copper
- Insulation: Color-Coded PE  
(Polyethylene)
- Jacket: PVC  
(Polyvinylchloride)

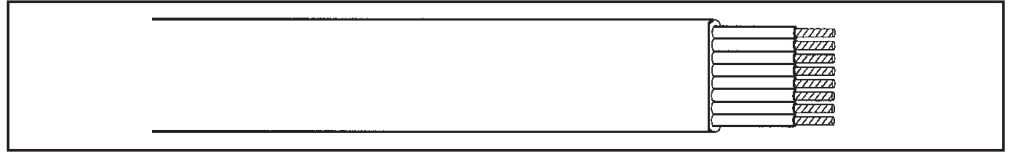

**26 AWG (0.14mm<sup>2</sup>), 7/34 (7x0.16mm)**

Part Number	No. of Cond.	AWG	Conductor			Insulation Thickness		Insulation Diameter		Jacket Thickness x Width		EDP #
			mm <sup>2</sup>	Strand	ø mm	Inches	mm	Inches	mm	Inches	mm	
<b>1604</b>	4	26	0.14	7/34	7x0.16	0.010	0.25	0.037	0.95	0.1 x 0.200	2.5 x 5.0	<b>107720</b>
<b>1604 B</b>	4	26	0.14	7/34	7x0.16	0.010	0.25	0.037	0.95	0.1 x 0.200	2.5 x 5.0	<b>107719</b>
<b>1606</b>	6	26	0.14	7/34	7x0.16	0.010	0.25	0.037	0.95	0.1 x 0.275	2.5 x 7.0	<b>107721</b>
<b>1606 B</b>	6	26	0.14	7/34	7x0.16	0.010	0.25	0.037	0.95	0.1 x 0.275	2.5 x 7.0	<b>107722</b>
<b>1608</b>	8	26	0.14	7/34	7x0.16	0.010	0.25	0.037	0.95	0.1 x 0.335	2.5 x 8.5	<b>107723</b>
<b>1608 B</b>	8	26	0.14	7/34	7x0.16	0.010	0.25	0.037	0.95	0.1 x 0.335	2.5 x 8.5	<b>107724</b>

### DESCRIPTION

- Multiconductor
- Stranded
- Unshielded
- Flat (Oval)

### AVAILABILITY

- 328 ft (100m), 1000 ft (305m)  
*QWIK-REEL™* packages only

#### COLOR CHART #251

<b>1604</b> - Black, Red, Green & Yellow	<b>1606</b> - White, Black, Red, Green, Yellow & Blue	<b>1608</b> - Slate, Orange, Black, Red, Green, Yellow, Blue & Brown
--	---	--