



<b>Plug:</b> JIS 8303 <b>Approvals:</b> DENTORI	<b>Cable Type:</b> H05VVH2F0.75 <b>Current Rating:</b> 3 Amp <b>Voltage Rating:</b> 125V AC <b>Cable Temperature:</b> +5 °C to +70 °C <b>Material:</b> PVC <b>Length (± 0.1 m):</b> 1.8 m <b>Conductor Size:</b> 2 x 0.75 mm <sup>2</sup> <b>Wiring Code:</b> International <b>O.D. (Nominal):</b> Flat <b>Approx. Stranding:</b> 30 / 0.18	<b>Connector:</b> IEC 60320 C7 <b>Approvals:</b> UL/CSA
--	--	--


Document	Catalog No. / Katalog-Nr.	Description / Beschreibung	Weight/ea	VPE/Pack	U/M	EDP-No.
	<b>86532140</b>	<b>Japanese 3 Amp Class II Cordset with C7 Connector</b>				
		Japanese 3A/125Vac Class II Cordset w/C7 Connector, 1.8m, Black	90g	50	ea	<b>116971</b>


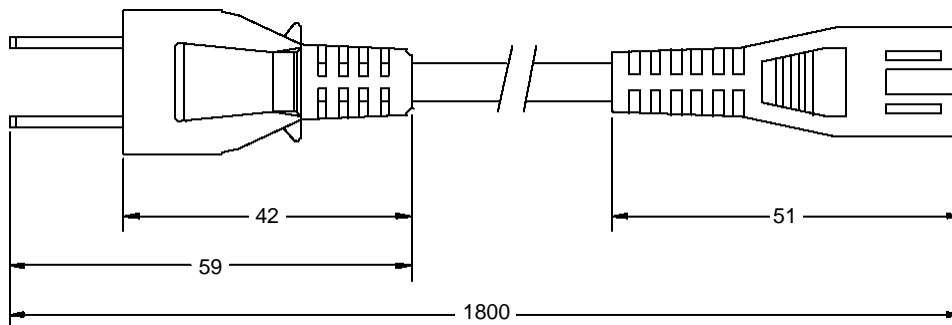


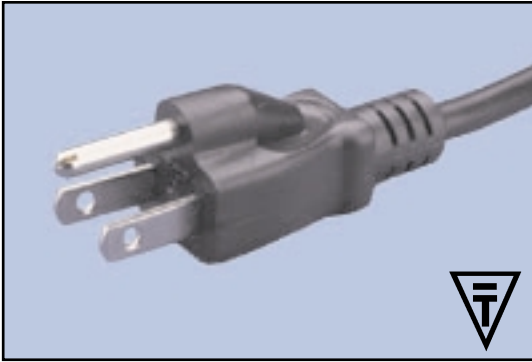

<b>Plug:</b> JIS 8303 <b>Approvals:</b> DENTORI	<b>Cable Type:</b> Japanese VCTF <b>Current Rating:</b> 3 Amp <b>Voltage Rating:</b> 125V AC <b>Cable Temperature:</b> 70 °C <b>Material:</b> PVC <b>Length (± 0.1 m):</b> 1.8 m <b>Conductor Size:</b> 3 x 0.75 mm <sup>2</sup> <b>Wiring Code:</b> North Am. <b>O.D. (Nominal):</b> ø 7.0 mm <b>Approx. Stranding:</b> 30 / 0.18	<b>Connector:</b> IEC 60320 C5 <b>Approvals:</b> DENTORI
--	---	---


Document	Catalog No. / Katalog-Nr.	Description / Beschreibung	Weight/ea	VPE/Pack	U/M	EDP-No.
	<b>86557110</b>	<b>Japanese 3 Amp Cordset with C5 Connector</b> Japanese 3A/125Vac Cordset with C5 Connector, 1.8m, Black	148g	50	ea	117730


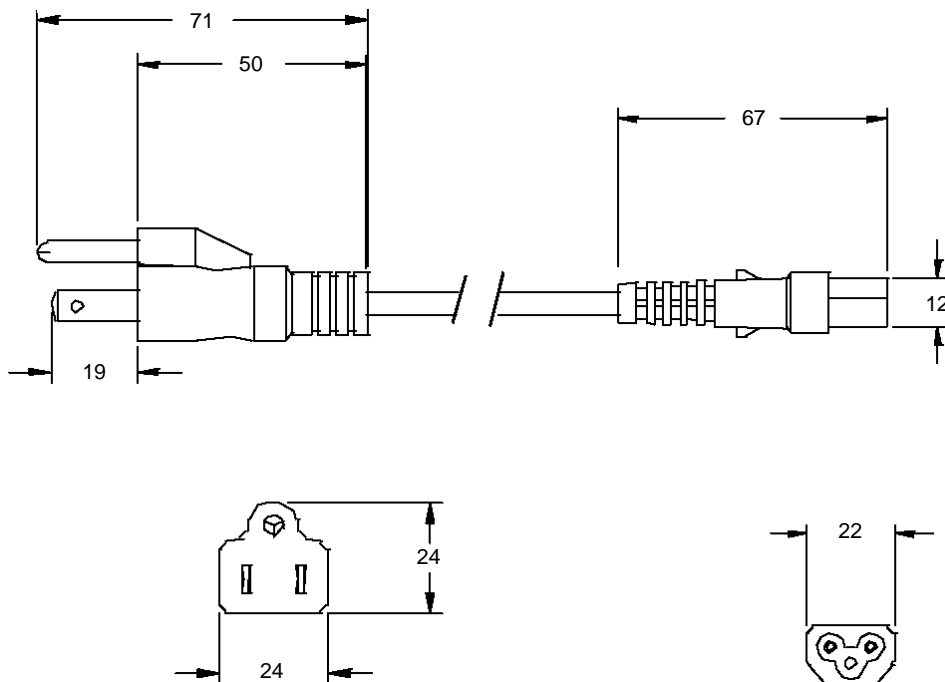


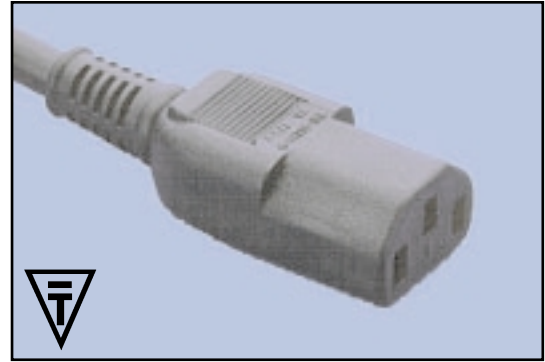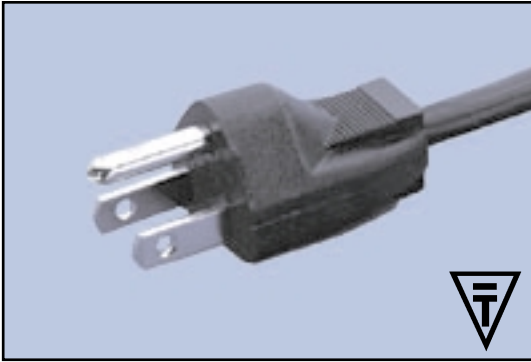

<b>Plug:</b> JIS 8303 <b>Approvals:</b> DENTORI	<b>Cable Type:</b> Japanese VCTF <b>Current Rating:</b> 7 Amp <b>Voltage Rating:</b> 125V AC <b>Cable Temperature:</b> 60 °C <b>Material:</b> PVC <b>Length (± 0.1 m):</b> 2.3 m <b>Conductor Size:</b> 3 x 0.75 mm <sup>2</sup> <b>Wiring Code:</b> North Am. <b>O.D. (Nominal):</b> ø 7.0 mm <b>Approx. Stranding:</b> 30 / 0.18	<b>Connector:</b> IEC 60320 C13 <b>Approvals:</b> DENTORI
--	---	--


Document	Catalog No. / Katalog-Nr.	Description / Beschreibung	Weight/ea	VPE/Pack	U/M	EDP-No.
	<b>86589000</b>	<b>Japanese 7 Amp Cordset with C13 Connector</b>				
		Japanese 7A/125Vac Cordset with C13 Connector, 2.3m, Black	230g	50	ea	<b>117344</b>


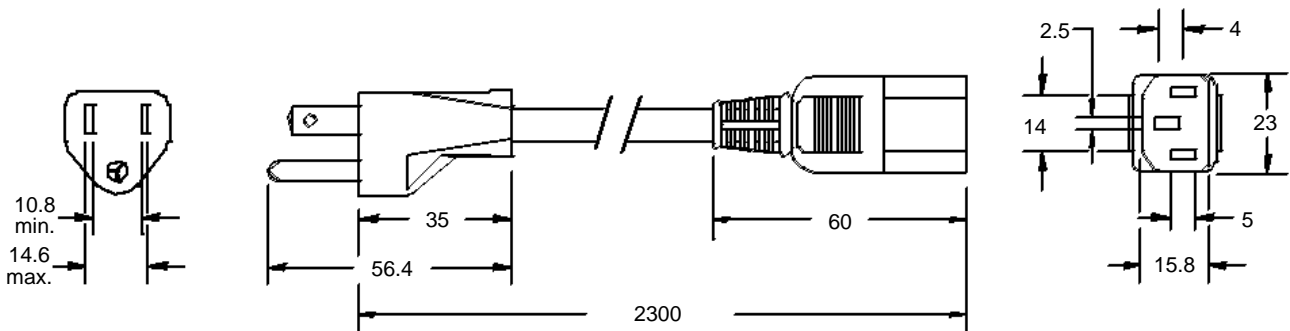


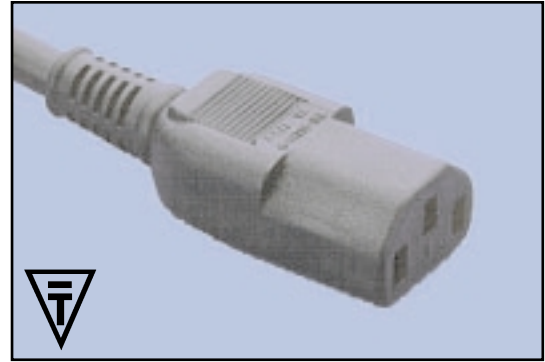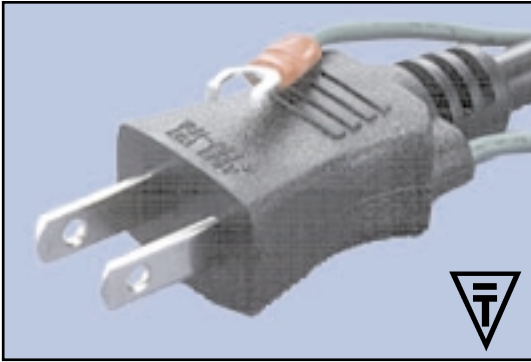

<b>Plug:</b> JIS 8303 <b>Approvals:</b> DENTORI	<b>Cable Type:</b> Japanese VCTF <b>Current Rating:</b> 12 Amp <b>Voltage Rating:</b> 125V AC <b>Cable Temperature:</b> 60 °C <b>Material:</b> PVC <b>Length (± 0.1 m):</b> 2.4 m <b>Conductor Size:</b> 3 x 1.25 mm <sup>2</sup> <b>Wiring Code:</b> North Am. <b>O.D. (Nominal):</b> ø 7.8 mm <b>Approx. Stranding:</b> 50 / 0.18	<b>Connector:</b> IEC 60320 C13 <b>Approvals:</b> DENTORI
--	--	--

Document	Catalog No. / Katalog-Nr.	Description / Beschreibung	Weight/ea	VPE/Pack	U/M	EDP-No.
<b>Japanese 12 Amp Cordset with C13 Connector</b>						
	<b>86589030</b>	Japanese 12A/125Vac Cordset with C13 Connector, 2.4m, Black	245g	50	ea	<b>117362</b>
	<b>86589040</b>	Japanese 12A/125Vac Cordset with C13 Connector, 2.4m, Gray	245g	50	ea	<b>117729</b>

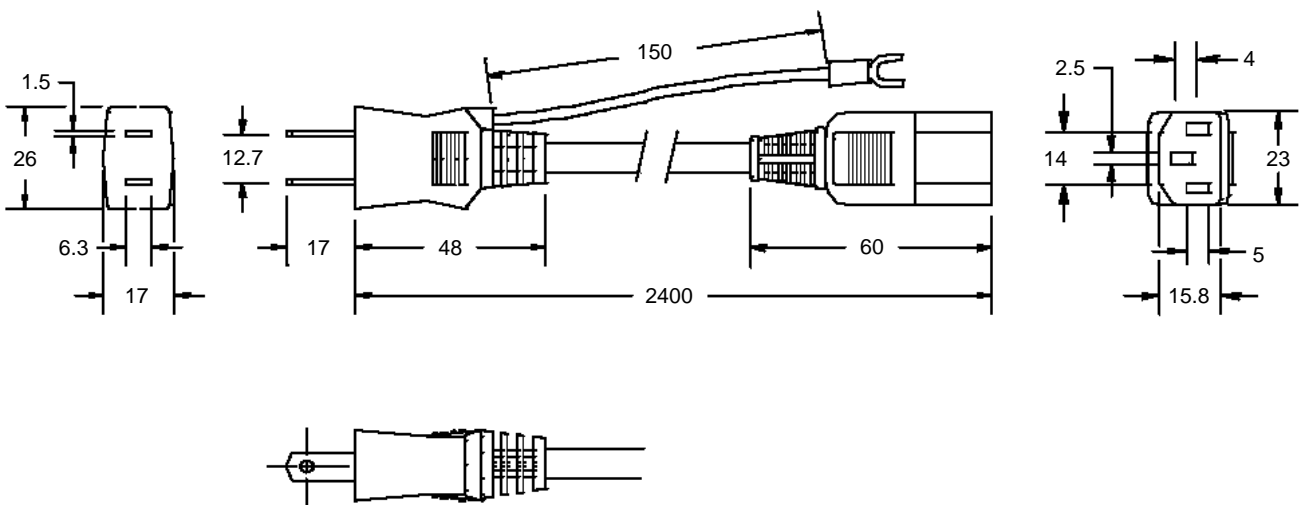

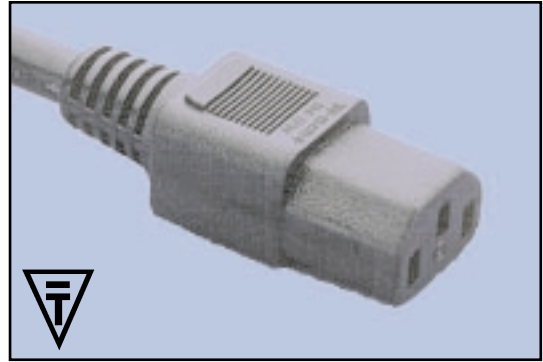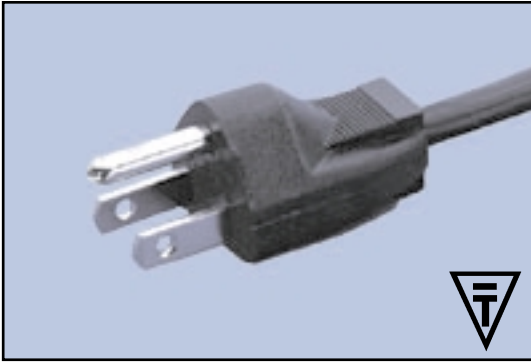

<b>Plug:</b> JIS 8303 <b>Approvals:</b> DENTORI	<b>Cable Type:</b> Japanese FT.VCTF <b>Current Rating:</b> 15 Amp <b>Voltage Rating:</b> 125V AC <b>Cable Temperature:</b> 60 °C <b>Material:</b> PVC <b>Length (± 0.1 m):</b> 2.4 m <b>Conductor Size:</b> 3 x 2.00 mm <sup>2</sup> <b>Wiring Code:</b> North Am. <b>O.D. (Nominal):</b> ø 8.5 mm <b>Approx. Stranding:</b> 37 / 0.263	<b>Connector:</b> IEC 60320 C13 <b>Approvals:</b> DENTORI
--	--	--

Document	Catalog No. / Katalog-Nr.	Description / Beschreibung	Weight/ea	VPE/Pack	U/M	EDP-No.
	<b>86589010</b>	<b>Japanese 15 Amp Cordset with C13 Connector</b> Japanese 15A/125Vac Cordset with C13 Connector, 2.4m, Black	363g	50	ea	<b>116966</b>

